

COUNTER TOP ELECTRIC PIZZA & BAKE OVENS

Job

ltem #

ELECTRIC COUNTER TOP OVENS \nearrow

Model DP-2Model DP-2BL

STANDARD FEATURES

- DP-2 @ 5050 watts in 208V or 220-240V
- Two independent, operator controlled cook/bake chambers each with a separate set of controls
- Two 15-minute electric timers with continuous ring, audible alarms and manual shut-offs (one for each chamber)
- □ 300°-650°F (149°-343°C) Thermostats (one for each chamber)
- Hearth stone decks
- □ 5 1/2" Deck height (140mm)
- □ All stainless steel exterior
- D Unitized, welded, aluminized steel interior
- Fully insulated
- □ 4" (102 mm) adjustable legs
- Interior lights
- □ Limited one year parts & labor warranty

OPTIONS & ACCESSORIES

- Stainless steel stand with or without casters
- Stacking kit
- Steel decks in lieu of hearth stone
- International voltages
- Infinite controls for independent top and bottom heat control
- □ 4" adjustable legs
- Brick lined



Model DP2 with optional top & bottom heat controls

SPECIFICATIONS

The DP-2 electric counter top ovens feature two independent, operator controlled baking chambers with 5 1/2" (140mm) deck heights and hearth stone decks making them ideal for baking and roasting or pizza.

The DP-2 features two sets of controls — one set for each bake chamber. Each set consists of a 15-minute electric timer with continuous ring audible alarms and manual shut-offs, ready-on oven indicator light, and a 284-680° F (140-360°C) thermostat.

The exterior front, sides, top and door are fabricated of heavy gauge type 430 stainless steel with a #4 finish. Door handle is constructed of tubular stainless steel. Exteriors measures 26" wide (660mm) by 28" deep (711mm) by 24" tall (610mm) overall.

The interiors are constructed of high heat aluminized steel, welded to form a single unitized body. The entire oven is insulated with 1 1/2" thick (38mm) industrial grade insulation. Each hearth stone deck measures 20 3/4" (527mm) by 20 3/4" (527mm) by 1/2" thick (13mm).

Incoloy, tubular heating elements provide top and bottom heat with up to 5050 watts in 208V or 220-240V, single or three phase. International voltages available. Ovens are stackable.

Brick lining increases top heat intensity and speeds recovery.

1 Year limited parts and labor warranty included.





CE



BAKERS PRIDE OVEN COMPANY, INC. 30 Pine Street, New Rochelle, NY 10801 914/576-0200 • 1-800-431-2745 • fax 914/576-0605

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification

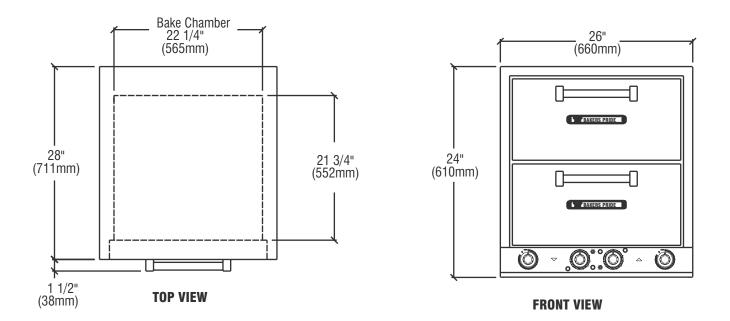

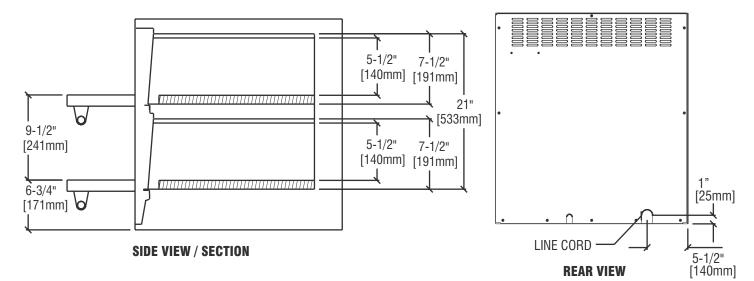

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION										
	Shipping	y Weigh	t	Carton Dimensions				Crate Size		
	Lbs. Ki	Kilos	Wilso		Depth		Height		Cubic	Cubic
Model	LUS.	MIUS	Inches	mm	Inches	mm	Inches	mm	Feet	Meter
DP-2	278	126	36	914	32 1/2	826	32	813	17.7	.51
Under 500 lbs	 Shinning 	t Class #	70							

#

2

mm

Decks

Cook

Chambers

2

Width

660

Inches |

26

POWE	ER SUPP	LY						
Model	WATTS	VOLTAGE	PHASE	AMPS	USA	NEM Canada	A Plug # UK	Europe
DP2	5050	208	1 & 3	24.5 & 14.0	6-30P	6-30P		
DP2	5050	220-240	1 & 3	22.0 & 12.7	6-30P	6-30P		

Shipping Cl

Deck Size

20 3/4 x 20 3/4 527x527

Inches

Each oven requires a separate electrical connection. 1 Phase and Canada include cord and plug 3 Phase and International voltages has no line cord

		le Construction*	Combustible Construction		
	Inches	mm	Inches	mm	
Left Side	0	0	1	25	
Right Side	0	0	1	25	
Rear	0	0	1	25	



SPECIFICATIONS

6-30P US & Canada

BAKERS PRIDE

Model

DP-2

BAKERS PRIDE OVEN COMPANY, INC. 30 Pine Street, New Rochelle, NY 10801 914/576-0200 • 1-800-431-2745 • fax 914/576-0605 Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification TSW:10/06

Overall Dimensions

Depth

mn

711

Inches

28

Height'

610 Height without legs

Inches mm

24