

BEVERAGE-AIR

PO Box 5932, Spartanburg, SC 29304 1-888-845-9800 Fax# 1-864-582-5083 http://www.Beverage-Air.com

Commercial Refrigeration Equipment General Specification

UCR/UCF—SERIES UNDERCOUNTER UNITS

Select from 4 standard sizes in widths of 46" (1 door), 67" (2 door), 93" (3 door), and 119" (4 door). Overall height is 34 1/2" with units installed on 6 inch casters (2 with brakes).

CABINET CONSTRUCTION

Construction features include stainless steel exteriors and anodized aluminum interiors. Cabinet back and bottom are galvanized steel. Interiors accommodate sheet pans and hotel pans. Pan slides are optionally available.

Cabinets are insulated with 2" thick foamed-in-place polyure-thane insulation. Doors are mounted to cabinet on self-closing, cartridge style hinges with 120° stay open feature. Doors are equipped with a snap-in-place vinyl magnetic gaskets for positive seal. Convenient, double pull style door handle is made of black anodized aluminum. 6" high casters are standard, 2 include brakes. An 8' cord set is provided with 115 volt models. Cabinet interior standard with 2 steel wire epoxy coated shelves per section. Interior light with manual switch is provided with glass door models.

REFRIGERATION

Balanced refrigeration systems provide high humidity storage of product at 35° to 38°. One size undercounter freezer UCF67 holds product below zero and is equipped with time activated, temperature terminated, electric defrosting.

Refrigerants include CFC free R134a in refrigerators and 404A in freezers to comply with all environmental standards.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

SPECIAL FEATURES

- Cartridge style door hinges provides positive seal & eliminates door sagging issues (excludes glass door and some special units).
- Optional 6" legs or 3" casters available



32" DEPTH
UNDERCOUNTER
REFRIGERATORS
AND FREEZER
FOOD PREPARATION SERIES

MODELS: UCR46A UCR/UCF67A UCR93A UCR119A



UCR/UCF67



UCR93

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.













Available From:

Model Specified	Store#
Location	Quantity





PLAN VIEWS


Undercounter Refrigerators and Freezer 32" Base Model Series


Models: UCR46A / UCR67A / UCR93A / UCR119A / UCF67A

MODEL	UCR46A	UCR67A	UCR93A	UCR119	UCF67A
EXTERNAL DIMENSIONAL DATA					
Length Overall (inches) Length Overall (mm)	46" 1168	67" 1702	93" 2362	119" 3023	67" 1702
Depth Overall (inches) - Less handle Depth Overall (mm) - Less handle	32" 813	33 3/4" 857	33 7/8" 860	33 3/4" 857	33 3/4" 857
Height Overall— on 6" casters (inches) Height Overall—on 6" casters (mm)	34 1/2" 876	34 5/8" 880	32 1/4" 819	32 3/8" 822	34 5/8" 880
Depth with Door Open 90 °	55 3/8"	55 7/8"	57"	55 7/8"	57"
Clear Door Opening (inches)	21 1/2" x 23 1/2"	23 1/3" x 25 1/4"	21 1/2" x 23 1/2"	21 1/2" x 23 1/2"	21 1/2" x 23 1/2"
Number of doors	1	2	3	4	2
INTERNAL DIMENSIONAL DATA					
NET Capacity (cubic ft.) NET Capacity (Liters)	6.2 175	19.21 544	29.7 841	40.5 1147	19.21 544
Internal Length Overall (inches) Internal Length Overall (mm)	22" 559	48" 1219	74" 1880	100 1/8" 2543	48" 1219
Internal Depth Overall (inches) Internal Depth Overall (mm)	26" 660	28" 711	28" 711	28" 711	28" 711
Internal Height Overall (inches) Internal Height Overall (mm)	23 1/2" 597	25" 635	24" 610	25 1/4" 641	25" 635
Number of shelves	2	4	6	8	4
ELECTRICAL DATA					
Full Load Amperes 115/60/1	6.3	6.3	8.6	8.6	8.6
ENERGY CONSUMPTION (KWH)	2.81	2.56	3.49	3.91	15.3
REFRIGERATION DATA					
Horsepower	1/4	1/4	1/3	1/3	3/4
WEIGHT DATA					
Gross Weight (Crated lbs)	240	342	442	535	405
Gross Weight (Crated kg)	109	155	201	243	184

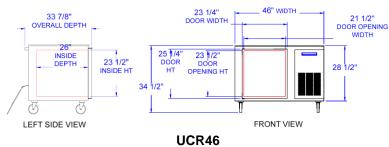








33 7/8"


30 5/8'

TOP

INSIDE

DEPTH

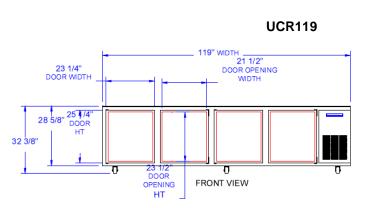



24" INSIDE HT