

Item #:

High Speed Combination Oven Amana[®] Commercial Jetwave[™] Model ACE19N

Power Output

- Convection:
 - 2700 W
 - 150° 475° F (65° 250° C) temperature range
 - Convected air for enhanced toasting and browning
- Microwave:
 - 1900 W
 - Heats guickly, reduces cooking time

Cuts Costs

- Uses less energy than a conventional oven.
- Eliminates need for pre-cooking and holding.
- Uses quarter size metal trays, pans and screens.

- Touch pad operation for consistent results.
- Controls are intuitive and simple to use.
- Stores up to 100 menu items.
- Four stage cooking option.
- USB Port compatible with standard flash drives, updates programming in seconds.
- 1.2 cubic ft. (34 liter) oven capacity.
- Door opens 90°+ for full access to the oven cavity.
- Single rack position for optimal and consistent cooking results.
- Braille touch pads are ADA compliant.
- Stainless steel door and interior.
- Removable, cleanable air filter and clean filter reminder protect oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center 866-426-2621.





319-368-8120

AIA File #

Simplifies Cooking

Easy to Use and Maintain






Model ACE19N shown

- Kitchen shelf
- Kitchen countertop, single or stacked
- Equipment stand, single or stacked

by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621





Click here to buy now!


1-866-285-1252



All ACP, Inc. commercial ovens are backed



Amana[®] Commercial Jetwave[™] Model ACE19N | High Speed Combination Oven

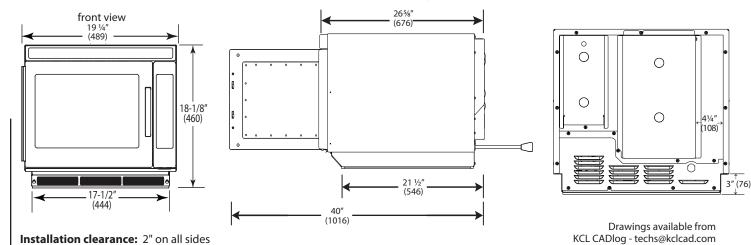

Specifications				Specifications	
Model	ACE19N	728028376753	3	Oven shall combine two cooking modes: convection and	
Cooking Power*	2700W	1900W		microwave for high speed cooking. Control panel shall be	
	Convection	Microwave		programmable with the ability to program up to 100 menu items, single or double digit entry. Programs shall be	
Configuration	Countertop			automatically updated using a USB Port that is compatible	
Control System	Touch			with standard USB flash drives. There shall be 11 power	
Programmable Control Pads	10			levels and 4 cooking stages. Microwave output shall be	
Braille	Yes			1900 watts and distributed from the top of the cavity.	
Total Programmable Settings	100			An automatic voltage sensor shall accommodate both	
Power Levels	11			208 and 240 volts. The 2700 watt convection oven shall	
Max. Cooking Time	16:00			provide a temperature range from 150° - 475° F (70° - 250°	
Stackable	Yes			C) in 5° increments . The convection fan located in the	
Time Entry Option	Yes			back of the cavity shall distribute the heat throughout the cavity to further enhance browning. Maximum microwave	
Microwave Distribution	Rotating antennas, top			cooking time shall be 16 minutes. Oven shall have a powder coat exterior. 1.2 cubic ft. (34 liter) oven cavity shall be stainless steel construction with stainless oven door. Interior shall have 1 rack position. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Oven shall be	
Magnetrons	2				
Display	LED-backlit LCD				
Stage Cooking	Yes, 4				
Door Opening	Lift & Pull				
Automatic Voltage Sensor	Yes				
USB Port	Yes			stackable. Microwave oven shall comply with standards se	
Temperature Range	150°- 475°F (70°-250°C)			by the U.S Department of Health and Human Services, and	
Air Filter	Yes, removable, with clean filter reminder			ETL listed for safety and sanitation.	
Rack	2 positions, 1 removable rack				
Exterior Dimensions	H 18 1⁄8" (460)	W 19 ¼″ (489)		Optional Accessories	
Cavity Dimensions	H 10 ½″ (267)	W 13″ (330)	D 15″ (381)	Pizza stone	
Door Depth	39 1⁄8″ (994), 90°			• Drip tray	
Usable Cavity Space	1.2 cubic ft. (34 liter)			Oven paddle	
Exterior Finish	Powder Coat			Warranty	
Interior Finish	Stainless steel			Warranty Certificate for this product can be found on the	
Power Consumption	5300 W, 26 A			ACP, Inc. website at:	
Power Output*	1900 W* Microwave			www.acpsolutions.com/warranty	
Power Source	208/240 V, 60 Hz, 30 A single phase			Service	
Plug Configuration / Cord	NEMA 6-30	5 ft. (1.5 m)		All products are backed by	
Frequency	2450 MHz			the ACP, Inc. 24/7 ComServ	
Product Weight	107 lbs. (49 kg.)			Support Center.	
Ship weight (approx.)	112 lbs. (51 kg.)			ComServ	
Shipping Carton Size	H 21 ½" (546) W 21 ½" (546) D 29 ¾" (756)			Commercial Service	

* IEC 60705 Tested ** Includes handle

Part No. 20155003 Updated 6/17/15 Original Instructions



800-233-2366

© 2015 ACP, Inc. Cedar Rapids, Iowa 52404

AIA File #:

Specification #: