

# Glo-Ray 2-Go™ Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

The Hatco Glo-Ray 2-Go<sup>™</sup> Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 200°F (93°C).

### Standard features

- Shelves are 20" (508 mm) deep and 39" (991 mm) wide, large enough for pizza boxes and bags, which will easily fit into the 13" (330 mm) clearance of each shelf
- Touchscreen control with digital read out indicates seperate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall



 Unit comes with side wall mounting brackets, 6" (152 mm) adjustable flanged feet that can be bolted to the floor and a 6' (1829 mm) recessed cord and plug

Project
Item #
0



**Options** (available at time of purchase only)

Designer Colors -

Non-standard colors are non-returnable – Stainless Steel standard

Warm Red

Black

Gray Granite

Navy Blue

Hunter Green

Antique Copper

## Accessories

☐ Navy Blue

□ Back panels – one panel per shelf – Stainless Steel standard –

Designer Colors – Non-standard colors are non-returnable –

Painted units are made of cold-rolled steel –

□ Warm Red □ Black □ Gray Granite □ White Granite
□ Navy Blue □ Hunter Green □ Antique Copper

□ Side panels – one panel per shelf – Stainless Steel standard –

Designer Colors – Non-standard colors are non-returnable –

□ Warm Red □ Black □ Gray Granite □ White Granite

☐ Hunter Green ☐ Antique Copper


For operation, location and safety information, please refer to the Installation & Operating Manual.







# Glo-Ray 2-Go<sup>TM</sup> Heated Shelves Models: GRS2G-3920-2, -3, -4, -5

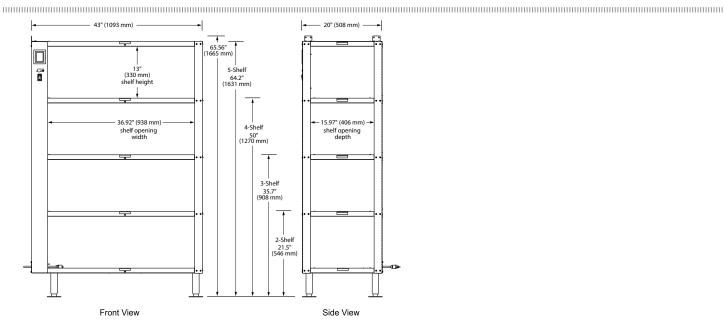

**SPECIFICATIONS** Glo-Ray 2-Go™ Heated Shelves The shaded areas contain electrical information for International models

Model	Description	Dimensions (W x D x H•)	Volts	Watts	Amps	Plug	Ship Weight*
GRS2G-3920-2	2 shelves	43" x 20" x 21.5" (1093 x 508 x 546 mm)	120	704	5.6	NEMA 5-15P <sup>▲</sup>	150 lbs. (69 kg)
			220	644	2.9	BS-1363, CEE 7/7 Schuko	
			230	704	3.1	BS-1363, CEE 7/7 Schuko	
			240	766	3.2	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-3			120	1055	8.8	NEMA 5-15P▲	
	3 shelves	43" x 20" x 35.7" (1093 x 508 x 908 mm)	220	965	4.4	BS-1363, CEE 7/7 Schuko	175 lbs. (80 kg)
			230	1055	4.6	BS-1363, CEE 7/7 Schuko	
			240	1148	4.8	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-4			120	1406	11.7	NEMA 5-15P <sup>▲</sup>	
	4 shelves	43" x 20" x 50"	220	1285	5.8	BS-1363, CEE 7/7 Schuko	200 lbs. (91 kg)
			230	1406	6.1	BS-1363, CEE 7/7 Schuko	
		(1093 x 508 x 1270 mm)	240	1529	6.4	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-5	5 shelves	43" x 20" x 64.2" (1093 x 508 x 1631 mm)	120	1757	14.6	NEMA 5-15P▲	225 lbs. (103 kg)
			220	1607	7.3	BS-1363, CEE 7/7 Schuko	
			230	1757	7.6	BS-1363, CEE 7/7 Schuko	
			240	1912	8.0	BS-1363, AS-3112, CEE 7/7 Schuko	

Height does not include 1.35" side wall mounting brackets.
 \* Ship weight includes packaging.

#### **CORD LOCATION**

Server side, bottom corner - is an 45° recessed cord.

## **PLUG CONFIGURATIONS**

**NEMA 5-15P NEMA 5-20P** BS-1363 AS 3112 CEE 7/7 Schuko

# **PRODUCT SPECS**

Glo-Ray 2-Go™ Heated Shelves

The Heated Shelves shall be a Glo-Ray 2-Go™ Model ..., rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The shelves shall consist of thermostatically-controlled heated base, touchscreen controls with seperate heat and timer for each shelf and a 6' (1829 mm) recessed cord with plug attached.

Accessories shall include side and back panels.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. www.hatcocorp.com | support@hatcocorp.com

Form No. GRS2G Spec Sheet Page 2 of 2 April 2020

<sup>&</sup>lt;sup>▲</sup>Canadian models use NEMA 5-20P.