



Item # _____

We put space to work.

Job _____

MetroMax® Q Mobile Polymer Shelving / Stem Caster Carts

Quick-to-adjust, corrosion resistant mobile shelving offers a sturdy, long lasting movable storage solution or transport cart. Rigid one-piece shelf frame with wraparound corners provides complete 360° capture of the wedge and post to ensure stability, and overall strength. Shelves have polymer shelf mats that are impact resistant for long life and quick-to-remove for easy routine cleaning. The shelf frames have a durable epoxy coating over an electroplated substrate. Shelves offer a 20 year warranty against corrosion. Rust proof polymer posts offer a lifetime warranty against corrosion. Shelf mats and posts have built-in Microban® antimicrobial product protection. Proprietary quick-release corner release enables fast, no-tool shelf adjustment. Each cart can safely store or transport 900lbs. (408kg). Units assemble easily — Shelves mount on four one-piece wedges along grooved, numbered posts. Shelves adjust on 1" (25mm) increments.




Five tier cart



Four Tier Cart

- **Preconfigured Units:** include shelves, posts, and casters under one easy to order model number. Choose models that fit the application: Rust resistant polymer casters for wet conditions. Chrome plated casters for general storage areas.
- **Forever Strong:** Proven corner connection and four-sided shelf frame with center truss(es) assures stability and impact resistance over thresholds in mobile uses: 800 lbs. (363kg) per shelf for lengths of 24" to 48" (610 to 1219mm) 600 lbs. (272kg) per shelf for lengths of 54" (1372mm) or longer Mobile unit: up to 900lbs (408kg) evenly distributed.
- **Life-Long Rust Resistant:** Shelves offer a 20 year warranty against rust and corrosion. Polymer posts are rust-proof; lifetime warranty against rust and corrosion.
- **Easy to Clean and Maintain:** Polymer mats can be easily removed and cleaned in a sink or commercial washer / dish machine.
- **Microban® Antimicrobial Product Protection:** built into the shelf mats and posts to inhibit the growth of bacteria, mold, mildew, and fungus that cause odors and product degradation. Microban product protection keeps the product "cleaner between cleanings".
- **Quick-to-Adjust:** Patented corner release allows shelves to be adjusted without tools. Simply flip each corner release, relocate the wedge connectors on the posts, and reposition the shelf. Quickly adjust shelves to reclaim wasted vertical space.
- **Efficient Use of Space:** Shelves adjust on 1" (25mm) increments along the post to maximize the use of available vertical space.
- **Fast, Easy Assembly:** Shelves are ready to use right out of the box. One-piece wedges securely attach to the posts – Raised beads on the back of each wedge snap into the grooves on the post. Window on wedge aligns with numbers on the post to locate the desired shelf position. Shelf seats into position over the posts and wedges. A unit can be assembled without tools in minutes.
- **Four-shelf models** consists of sectioned open grid (vented) polymer shelf mats that promote air circulation and light penetration. Built-in ship's edge helps contain supplies.
- **Five-shelf models** have one solid bottom shelf with a one-piece removable shelf mat.
- **NSF Listed** for all environments.
- **Maximum Versatility:** Complete line of accessories are found on spec sheet 9.25.

Quick Adjusting

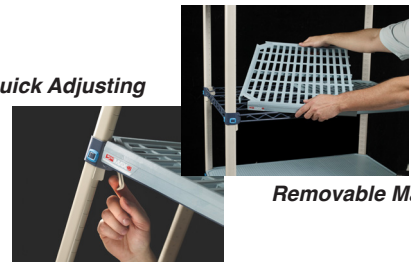

Removable Mats



Supports good **HACCP** processes

MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban® Products Company, Huntersville, NC. Microban® product protection does not by itself protect a user from food borne illness. Product must be routinely cleaned.



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: www.metro.com/contactus

LO2-206 Printed in U.S.A. 6/22

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2022 InterMetro Industries Corp.



MetroMax® Q Mobile Polymer Shelving / Stem Caster Carts

9-14



MetroMax® Q Mobile Shelving

We put space to work.®

Material Specifications:

- Shelf Mats: Injection-molded polypropylene with exclusive built-in Microban® antimicrobial product protection.
- Shelf frames and epoxy-coated posts: Steel with electroplated substrate and highly durable, abrasion-resistant epoxy finish. The adjustable foot is reinforced nylon.
- Polymer Post: Pultrusions — continuous glass fibers and thermoset resin composite with built-in Microban® antimicrobial product protection.
- Shelf Wedge Connector: Reinforced nylon.
- Temperature: -20°F (-29°C) to 125°F (52°C) continuous use, with intermittent exposure to 200°F (93°C) for cleaning.



Rust Resistant, 5PCX caster

Mobile Shelving units include shelves, posts, stem casters & bumpers.

- "-MP-" models include (2) swivel and (2) swivel/brake rust resistant polymer casters with polyurethane horns.
- "EGX3" models include 2 swivel & 2 swivel/brake polyurethane casters with plated horns.
- 4-shelf models include (4) open grid shelves.
- 5-shelf models include (4) open grid shelves and a solid bottom MetroMax i shelf.
- Note the heights of doorways. Models with 75-5/16" (1913mm) and shorter are best suited to clear doorways.



5MPX caster

| 4-Shelf Open Grid Mats - Unit Height 67 5/16 (1710mm) | | | | | |
|---|----------|-------------------------|------|--|---|
| Nominal Width/Length (in.) | (mm) | Approx. Pkd. Wt. (lbs.) | (kg) | Cat. No. Polymer Caster Polyurethane Tread | Cat. No. Plated Caster Polyurethane Tread |
| 18x36 | 457x914 | 54.0 | 24.5 | MQ-183668G-MP-4 | Q336EG3 |
| 18x42 | 457x1060 | 60.8 | 27.6 | MQ-184268G-MP-4 | -- |
| 18x48 | 457x1219 | 68.0 | 30.8 | MQ-184868G-MP-4 | Q356EG3 |
| 18x60 | 457x1524 | 82.0 | 37.2 | MQ-186068G-MP-4 | Q366EG3 |
| 21x36 | 530x914 | 60.8 | 27.6 | MQ-213668G-MP-4 | Q436EG3 |
| 21x42 | 530x1060 | 66.4 | 30.1 | MQ-214268G-MP-4 | -- |
| 21x48 | 530x1219 | 73.2 | 33.2 | MQ-214868G-MP-4 | Q456EG3 |
| 21x60 | 530x1524 | 89.2 | 40.5 | MQ-216068G-MP-4 | Q466EG3 |
| 24x36 | 610x914 | 67.6 | 30.7 | MQ-243668G-MP-4 | Q536EG3 |
| 24x42 | 610x1060 | 75.6 | 34.3 | MQ-244268G-MP-4 | -- |
| 24x48 | 610x1219 | 78.4 | 35.6 | MQ-244868G-MP-4 | Q556EG3 |
| 24x60 | 610x1524 | 96.4 | 43.7 | MQ-246068G-MP-4 | Q566EG3 |

| 4-Shelf - Unit Height 75 5/16 (1913mm) | | | | | |
|--|----------|-------------------------|------|--|---|
| Nominal Width/Length (in.) | (mm) | Approx. Pkd. Wt. (lbs.) | (kg) | Cat. No. Polymer Caster Polyurethane Tread | Cat. No. Plated Caster Polyurethane Tread |
| 18x36 | 457x914 | 54.8 | 24.9 | MQ-183676G-MP-4 | Q336EG3 |
| 18x42 | 457x1060 | 61.6 | 27.9 | MQ-184276G-MP-4 | -- |
| 18x48 | 457x1219 | 68.8 | 31.2 | MQ-184876G-MP-4 | Q356EG3 |
| 18x60 | 457x1524 | 82.8 | 37.6 | MQ-186076G-MP-4 | Q366EG3 |
| 21x36 | 530x914 | 61.6 | 27.9 | MQ-213676G-MP-4 | Q436EG3 |
| 21x42 | 530x1060 | 67.2 | 30.5 | MQ-214276G-MP-4 | -- |
| 21x48 | 530x1219 | 74.0 | 33.6 | MQ-214876G-MP-4 | Q456EG3 |
| 21x60 | 530x1524 | 90.0 | 40.8 | MQ-216076G-MP-4 | Q466EG3 |
| 24x36 | 610x914 | 68.4 | 31.0 | MQ-243676G-MP-4 | Q536EG3 |
| 24x42 | 610x1060 | 72.4 | 32.8 | MQ-244276G-MP-4 | -- |
| 24x48 | 610x1219 | 79.2 | 35.9 | MQ-244876G-MP-4 | Q556EG3 |
| 24x60 | 610x1524 | 97.2 | 44.1 | MQ-246076G-MP-4 | Q566EG3 |

| 5-Shelf (4) Open Grid, (1) solid Unit Height 79 5/16 (2015mm) | | | | | |
|---|----------|-------------------------|------|--|---|
| Nominal Width/Length (in.) | (mm) | Approx. Pkd. Wt. (lbs.) | (kg) | Cat. No. Polymer Caster Polyurethane Tread | Cat. No. Plated Caster Polyurethane Tread |
| 18x36 | 457x914 | 72.8 | 33.0 | MQ-183680G-MP-5 | 5Q337EG3 |
| 18x48 | 457x1219 | 92.7 | 42.0 | MQ-184880G-MP-5 | 5Q357EG3 |
| 18x60 | 457x1524 | 106.8 | 48.4 | MQ-186080G-MP-5 | 5Q367EG3 |
| 24x36 | 610x914 | 88.8 | 40.3 | MQ-243680G-MP-5 | 5Q537EG3 |
| 24x48 | 610x1219 | 105.3 | 47.8 | MQ-244880G-MP-5 | 5Q557EG3 |
| 24x60 | 610x1524 | 124.8 | 56.6 | MQ-246080G-MP-5 | 5Q567EG3 |

Actual Dimensions including Bumpers: Add 2-5/16" (59mm) to width and 1-3/4" (45mm) to length.
 Note: 79-5/16" (2015mm) tall unit uses 74" (1890mm) posts (MX74UP).



Utility Carts - 39-1/4" (997mm tall)

- Quick Adjust MetroMax Q shelves, polymer posts, and Type 304 Stainless handle
- Corrosion resistant polymer horn casters can safely move up to 900lbs (408kg)

| Nominal Width/Length (in.) | (mm) | Actual Width/Length (in.) | (mm) | Description | Approx. Pkd. Wt. (lbs.) | (kg) | Cat. No. |
|----------------------------|---------|---------------------------|------------|-------------|-------------------------|------|--------------|
| 18x30 | 457x760 | 20 5/16 x 34 1/2 | 516 x 876 | 2-shelf | 30.0 | 13.6 | MQUC1830G-25 |
| 24x36 | 610x914 | 26 5/16 x 40 1/2 | 668 x 1029 | 2-shelf | 40.4 | 18.3 | MQUC2436G-25 |
| 18x30 | 457x760 | 20 5/16 x 34 1/2 | 516 x 876 | 3-shelf | 40.4 | 18.3 | MQUC1830G-35 |
| 24x36 | 610x914 | 26 5/16 x 40 1/2 | 668 x 1029 | 3-shelf | 56.0 | 25.4 | MQUC2436G-35 |



an Ali Group Company



The Spirit of Excellence