



Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Quantity \_\_\_\_\_

## Model E35 Electric Fryer



Model E35 Electric Fryer

### STANDARD SPECIFICATIONS CONSTRUCTION

- Welded tank with an extra smooth peened finish ensures easy cleaning
- Immersion type; sealed construction heating elements with high temperature alloy stainless steel sheath
- Fryers are designed with a fixed heating element to eliminate oil migration through pivot components. This design creates a safer working environment by keeping the hot elements in the tank.
- Stainless steel front, door, side, and splash back
- Bottom 1-1/4" NPT full port drain valve, for quick draining

### CONTROLS

- Electric thermostat maintains selected temperature automatically between 200°F (93°C) and 375°F.
- Temperature limit switch safely shuts off all heaters if the fryer temperature exceeds the upper limit

### STANDARD ACCESSORIES

- Tank-stainless steel
- Cabinet-stainless steel front, door, sides and splashback
- Electric thermostat with front panel ON/OFF switch
- One drain extension
- One drain line clean-out rod
- Fryer cleaner sample
- Two twin size baskets
- Removeable basket hanger for easy cleaning
- 6" (15.2 cm) adjustable legs

### AVAILABLE OPTIONS & ACCESSORIES (At Additional Cost)

- Tank Cover
- 6" (15.2 cm) Adjustable casters

[Click here to buy now!](#)

**Central**<sup>®</sup>  
**RESTAURANT PRODUCTS**  
WHOLESALE EQUIPMENT & SUPPLIES

**1-866-285-1252**


**Pitco Frialator, Inc** • P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow, NH 03304  
TEL: 603-225-6684 • FAX: 603-225-8497 •

L10-185 Rev 0 08/12 Printed in the USA

We reserve the right to change specifications without notice and without incurring any obligation for equipment previously or subsequently sold.

**Model E35 Electric Fryer**

INCHES (CM)

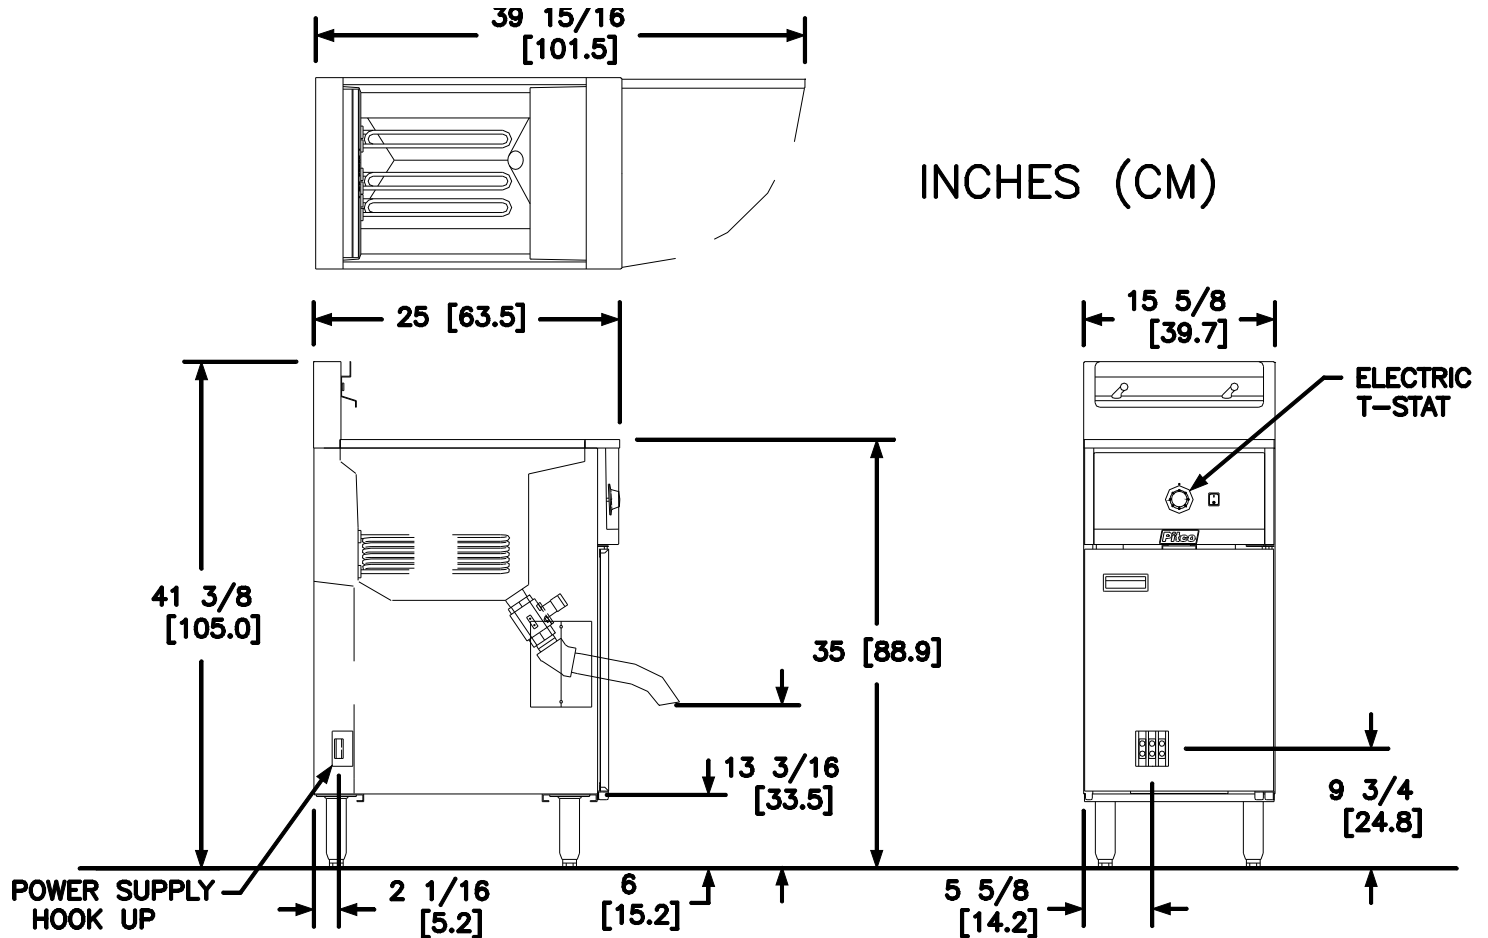

INDIVIDUAL FRYER SPECIFICATIONS											
Frying Area				Cook Depth				Oil Capacity			
14 x 14 in (35.6 x 35.6 cm)				4 in (10.2 cm)				35 Lbs (15.9 kg)			
ELECTRIC REQUIREMENTS											
Nominal Amps Per Line (50/60 HZ)		Single Phase (2 wire+ground wire)				3 Phase (3 wire+ground wire)			3 Phase "Y" (4 wire+ground wire)		
		208V	220V	230V	240V	208V	220V	240V	380/220V	400/230V	415/240V
	KW	15.0	13.7	15.0	16.3	15.0	13.7	16.3	13.7	15.0	16.3
Amps		72.1	62.4	65.2	68.1	41.6	36	39.3	20.9	21.7	22.7
* Not available in single phase power connections. Refer to local electrical codes for proper wire sizing and installation.											
SHORT FORM SPECIFICATION (Approximate)											
Shipping Weight			Shipping Crate Size H x W x L						Shipping Cube		
200 Lbs (91 kg)			45 x 19 x 36 in (114.3 x 48.3 x 91.4 cm)						17.8 ft <sup>3</sup> (0.5m <sup>3</sup> )		
SHORT FORM SPECIFICATION											
Provide Pitco Model E35 Electric fryer. Fryer shall have immersion type heating elements with high temperature alloy stainless steel sheath. Fryer shall have an electric thermostat with on/off switch and power on indicator. Stainless steel tank with smooth peened finish and 1-1/4" full port valve. Provide accessories as follows :											
TYPICAL APPLICATION											
Frying a wide variety of foods in a limited amount of space. Frying that requires a moderate volume production rate.											