

REACH-IN BOTTOM-MOUNT SERIES - FREEZERS







Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Freezers doors have integral factory installed heating element to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. KB27F door swing is field reversible
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel.
- Interior: 304 stainless steel
- Temperature: 0 to -10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug
- KB81F DV: 115/208-230/60/1 with NEMA L14-20P plug

Specifications

MODEL	DOORS	EXT DIMENSIONS W x D x H	INT. DIMENSIONS W x D x H	AMPS	H.P.	SHIP WEIGHT
KB27F	1	26.8 x 32.7 x 82.3	22.2 x 27.6 x 50.2	11	5/8	329 lbs
KB54F*	2	53.9 x 32.7 x 82.3	49.4 x 27.6 x 50.2	12	1	501 lbs
KB81F DV	3	81.0 x 32.7 x 82.3	76.4 x 27.6 x 50.2	8	1 1/4	625 lbs

CERTIFIED TO ANSI/NSF-7 STANDARDS










ikon series

REACH-IN BOTTOM-MOUNT SERIES - FREEZERS

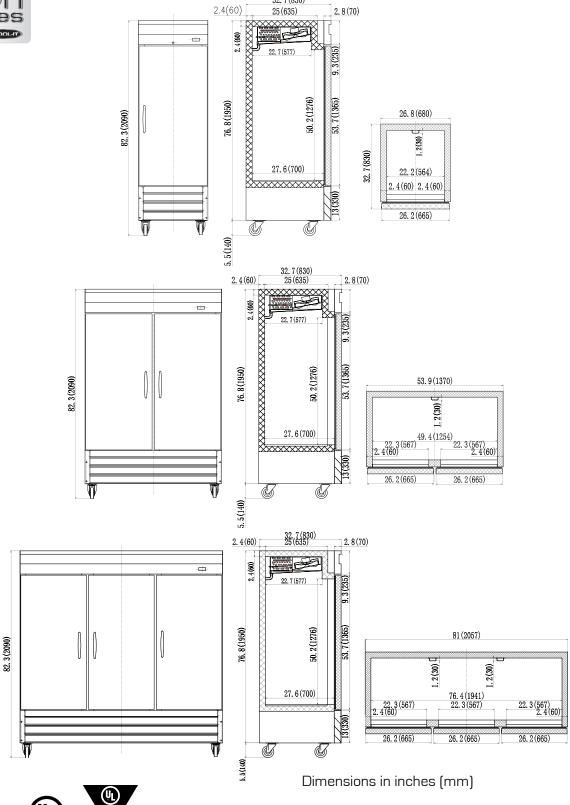



CERTIFIED TO ANSI/NSF-7 STANDARDS



5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108 Miami, FL, United States 33181 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100