



# Cuisine Series Heavy Duty Griddle Top Range

Item: \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_

Cuisine Series Heavy Duty Griddle Top Range

**Models:**

- |                                   |                                    |                                     |
|-----------------------------------|------------------------------------|-------------------------------------|
| <input type="checkbox"/> C836-1   | <input type="checkbox"/> C0836-1   | <input type="checkbox"/> C0836-1M   |
| <input type="checkbox"/> C836-1-1 | <input type="checkbox"/> C0836-1-1 | <input type="checkbox"/> C0836-1-1M |

Range with 36" Griddle Valve or Thermostat Controlled



*Model C836-1*

Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall

**Standard Features:**

- Griddle top with 1" (25mm) thick steel plate.
- Full-range valve control (-1)
- Griddle control, with embedded thermostat sensor bulb Low to 500F (260C) (-1-1)
- Stainless front and sides
- Stainless steel front rail w/ position adjustable bar
- 1 1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 6" (152mm) high stainless steel stub back
- 6"(152mm) chrome steel adj. legs
- Stainless steel oven interior w/ removable porcelain bottom
- 40,000 BTU burner
- Chrome plated rack with four positions, 1 per oven
- Fully insulated oven interior
- 100% safety oven pilot
- Oven thermostat control - 150°-500°F (66°-260°C)

**Optional Features:**

- Grooved griddle - (12"W sections)
- Range base convection oven (add RC)

- Porcelain oven interior in lieu of stainless steel interior NC
- Single or double deck high shelf or back riser
- Modular unit with legs and shelf (add "M")
- Modular unit w/o legs on Refrig. Base (add "PC")
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate shelf, 48-72" for battery installations
- Gas shut-off valves - 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4" - 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Stainless steel legs (set of four)
- Flanged feet set of four
- Swivel casters (4) w/ front locking
- Casters w/ polyurethane wheels - non marking
- Extra oven rack
- Rear Gas Connection: 3/4" NPT (max 250,000 BTU's)

**Specifications:**

U.S. Range Cuisine 36" (914mm) wide Heavy Duty Range Series. Model \_\_\_\_\_ with total BTU/hr rating of \_\_\_\_\_ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

**Ovens** - One piece oven door. Stainless steel oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C). One chrome plated oven rack for standard ovens and three for convection ovens.

**Griddle Tops** - 1" (25mm) thick steel plate griddle with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/hr each. One burner per 12" (305mm) section.



NOTE: Ranges supplied with casters must be installed with an approved restraining device.

Garland Commercial Industries, LLC  
 185 East South Street  
 Freeland, PA 18224  
 Phone: (570) 636-1000  
 Fax: (570) 636-3903

Garland Commercial Ranges Ltd  
 1177 Kamato Road,  
 Mississauga, Ontario  
 L4W 1X4 CANADA  
 Phone: 905-624-0260  
 Fax: 905-624-5669





# Cuisine Series Heavy Duty Griddle Top Range




Model #	Description	Total BTU (NAT. Gas)	Shipping	
			Cu Ft	Lb/Kg
C836-1	36" Manual Valve Control Griddle Top - w/Oven	130,000	50	706/320
C0836-1	36" Manual Valve Control Griddle Top - w/Storage	90,000	50	527/239
C0836-1M	36" Manual Valve Control Griddle Top - Modular Top	90,000	20	405/184
C836-1-1	36" Thermostatic Control Griddle Top - w/Oven	130,000	50	706/320
C0836-1-1	36" Thermostatic Control Griddle Top - w/Storage	90,000	50	527/239
C0836-1-1M	36" Thermostatic Control Griddle Top- Modular Top	90,000	20	405/184

Gas Pressure	NAT.	PRO.
Min. Supply	7" WC	11" WC
Operating	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2(323)	26-1/4 (667)	29 (737)
Convection	13-1/2(323)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

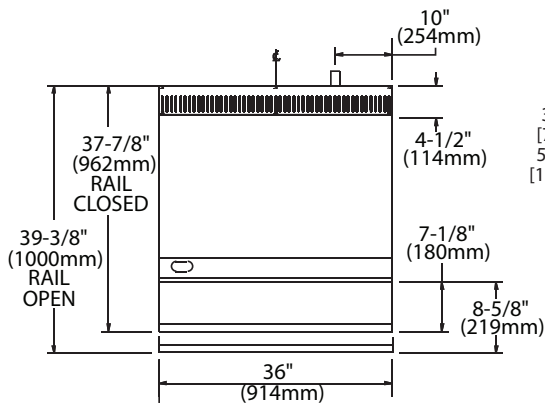

Individual Burner Ratings (BTU/hr)		
Burner	NATURAL	PROPANE
Griddle	30,000	30,000
Standard Oven	40,000	35,000
Convection Oven	37,000	35,000

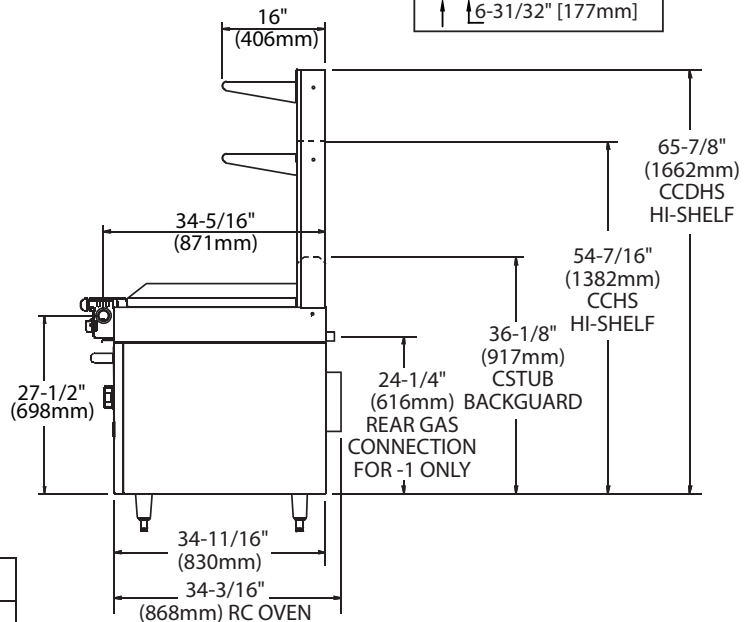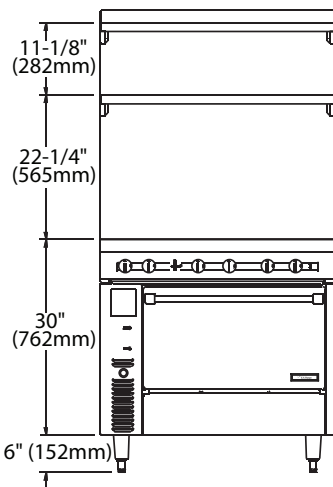

Combustible Wall Clearance	
Sides	Back
6" (152mm)	6" (152mm)

Form# C836-1 (05/28/09)

Garland Commercial Industries, LLC  
185 East South Street  
Freeland, PA 18224  
Phone: (570) 636-1000  
Fax: (570) 636-3903

Garland Commercial Ranges Ltd  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA  
Phone: 905-624-0260  
Fax: 905-624-5669

**anitowoc**