

## R. Star Manufacturing International, Inc.



# QCS2 SERIES CONVEYOR TOASTERS QCS2-500, QCS2-600H & QCS2-800

#### **QCS Features/Benefits:**

- ★ Holman's superior quartz infrared heaters provide faster, more consistent heating than traditional heating elements.
- ★ Holman's forced convection system keeps the toaster cool to the touch and extends the life of critical components. The forced convection increases productivity by re-circulating pre-heated air into toasting chamber.
- ★ Compact requires only 14-1/2" of counter space and the forced convection system allows the unit to be placed against a wall. Other toasters have louvers requiring additional counter space.
- ★ Productivity -
  - QCS2-500 produces up to 350 slices per hour operating on 120V. QCS2-800 produces up to 800 slices per hour. QCS2-600H with a 3" high opening produces up to 600 slices per hour.
- ★ Easy to use control panel takes the guesswork out of temperature and speed control settings.
- ★ Variable speed and top/bottom heat control for perfect color and texture of bread, bagels, English muffins and more!
- ★ Energy efficient operation with power saver switch that reduces electricity consumption by 75%. And our quartz heaters return to full power in seconds vs. minutes for metal-sheathed elements.
- ★ Extended conveyor belt for easy loading and large warming area for higher production.
- ★ Safe load up area with full width front burn guard and cool to the touch exterior.
- ★ "Smart" crumb tray keeps the bread crumbs from falling under the toaster.
- ★ Heated holding area to keep toast at the perfect temperature.
- ★ 24 hours 7 days a week technical support by Star technicians.

#### **Applications:**

Breakfast lunch or dinner, the QCS2 series are versatile enough to fulfill your menu requirements. Holman's QCS2 series toasters can generate up to 800 slices per hour in only 14-1/2" of counter space. Choose from our high volume QCS2-800 in 208 or 240 volts and if your power requirements are 120 volts the QCS2-500 will accommodate your specific needs. If you need a larger opening for Kaiser rolls, oversized bagels or sub rolls the QCS2-600H has a 3" product opening to provide consistent quality you expect from a Holman toaster.

#### **Quality Construction:**

Holman designs every toaster to stand up to the most rigorous foodservice demands. Stainless steel construction for long lasting durability. Heavy-duty motor, drive chain and conveyor speed control for superior reliability. Conveyor belt tension system for smooth and quiet operation. High performance Quartz Infrared Heaters for superior toasting performance and reliability. Units are easy to disassemble with one-piece cover for cleaning and service. Toasters are furnished with 1" adjustable legs and 4' cord.

## C UL) US









QCS2-500



QCS2-600H



QCS2-800

#### Warranty:

Holman's conveyor toasters are covered by a one-year parts and labor limited warranty.

**Star Manufacturing International Inc. -** 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800


Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com

H212/0116



### Star Manufacturing International, Inc.

# QCS2 SERIES CONVEYOR TOASTERS QCS2-500, QCS2-600H & QCS2-800

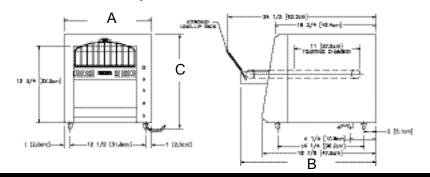

#### **Performance Data**

Model No.	Production Capacities	Product Openings
QCS2-500	up to 350 slices per hour	1-1/2"
QCS2-600H	up to 600 slices per hour	3"
QCS2-800	up to 800 slices per hour	1-1/2"

#### **Specifications**

	Dimensions			Shipping	Shipping Carton				
	Α	В	С			•			
	Width	Depth	Height	Weight	Width	Depth	Height		
	Inches	Inches	Inches	lbs.	Inches	Inches	Inches		
Model No.	(cm)	(cm)	(cm)	(kg)	(cm)	(cm)	(cm)		
QCS2-500	14-1/2	22-3/8	15-5/8	64	20	18-7/8	25-3/8		
	(36.8)	(56.8)	(39.7)	(29)	(50.8)	(47.9)	(64.4)		
QCS2-600H	14-1/2	22-3/8	15-5/8	64	20	18-7/8	25-3/8		
	(36.8)	(56.8)	(39.7)	(29)	(50.8)	(47.9)	(64.4)		
QCS2-800	14-1/2	22-3/8	15-5/8	64	20	18-7/8	25-3/8		
	(36.8)	(56.8)	(39.7)	(29)	(50.8)	(47.9)	(64.4)		

Electrical Data									
				Heating Elements					
Volts	HZ 1 Phase	Amps	Watts	Above Belt	Below Belt	NEMA			
120	60	14.2	1700	2	2	5-15P (5-20P Canada)			
208	60	13.5	2800	2	2	6-20P			
240	60	11.7	2800	2	2	6-20P			
220	50	12.7	2800	2	2	CEE7-7			
208	60	13.5	2800	2	2	6-20P			
240	60	11.7	2800	2	2	6-20P			
220	50	12.7	2800	2	2	CEE7-7			
	Volts 120 208 240 220 208 240	Volts         HZ 1 Phase           120         60           208         60           240         60           220         50           208         60           240         60	Volts         HZ 1 Phase         Amps           120         60         14.2           208         60         13.5           240         60         11.7           220         50         12.7           208         60         13.5           240         60         11.7	Volts         HZ 1 Phase         Amps         Watts           120         60         14.2         1700           208         60         13.5         2800           240         60         11.7         2800           220         50         12.7         2800           208         60         13.5         2800           240         60         11.7         2800	Volts         HZ 1 Phase         Amps         Watts         Heating In Above Belt           120         60         14.2         1700         2           208         60         13.5         2800         2           240         60         11.7         2800         2           220         50         12.7         2800         2           208         60         13.5         2800         2           240         60         11.7         2800         2           240         60         11.7         2800         2	Volts         HZ 1 Phase         Amps         Watts         Heating Elements           120         60         14.2         1700         2         2           208         60         13.5         2800         2         2           240         60         11.7         2800         2         2           220         50         12.7         2800         2         2           208         60         13.5         2800         2         2           240         60         11.7         2800         2         2           240         60         11.7         2800         2         2			

<sup>&</sup>lt;sup>1</sup>Can be supplied with metal sheathed heaters (no additional charge), however production will be reduced.

#### **Typical Specifications**

Conveyor toasters are constructed of corrosion resistant stainless steel. Supplied with heavy-duty motor, drive chain and fast heat up quartz infrared heaters. A conveyor belt tension system is supplied for a smooth, quiet operation. Units are supplied with variable speed control, top and bottom heat control, power saver and high limit switch. Extended conveyor belt, crumb tray, heated holding area and full width burn guard are standard. Unit has a one-piece cover for easy access with 1" adjustable legs and a 4' cord. Units are listed with UL, CUL and are UL certified to NSF4. Patent number D459,140. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

**Star Manufacturing International Inc. -** 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800 Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com