



# STAINLESS STEEL EQUIPMENT FILLER TABLE

## FEATURES:

TOP is furnished with 1 5/8" sanitary rolled rim edge in front. Square edges on sides and 1/1/2" splash of single metal thickness on rear.

Hat channels stud welded to top which reinforces and maintains a level working surface.

Welded Front to Back Leg Assembly.

Rear (Left to Right) Stretcher bolts to side leg assemblies.

## CONSTRUCTION:

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.

## MATERIAL:

**TOP:** 16 gauge stainless steel type "304" series.

**STRETCHERS:** 1 5/8" diameter tubular stainless steel.

**LEGS:** 1 5/8" diameter tubular stainless steel.

Stainless steel gussets.

1" stainless steel bullet feet.

**Item #:** \_\_\_\_\_ **Qty #:** \_\_\_\_\_

**Model #:** \_\_\_\_\_

**Project #:** \_\_\_\_\_




Model #	Width	Length	Wt.
TFMS-182	18"	24"	27 lbs.
TFMS-180	18"	30"	35 lbs.
TFMS-183	18"	36"	43 lbs.
TFMS-152	15"	24"	25 lbs.
TFMS-150	15"	30"	33 lbs.
TFMS-153	15"	36"	41 lbs.
TFMS-122	12"	24"	22 lbs.
TFMS-120	12"	30"	31 lbs.
TFMS-123	12"	36"	39 lbs.

## DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

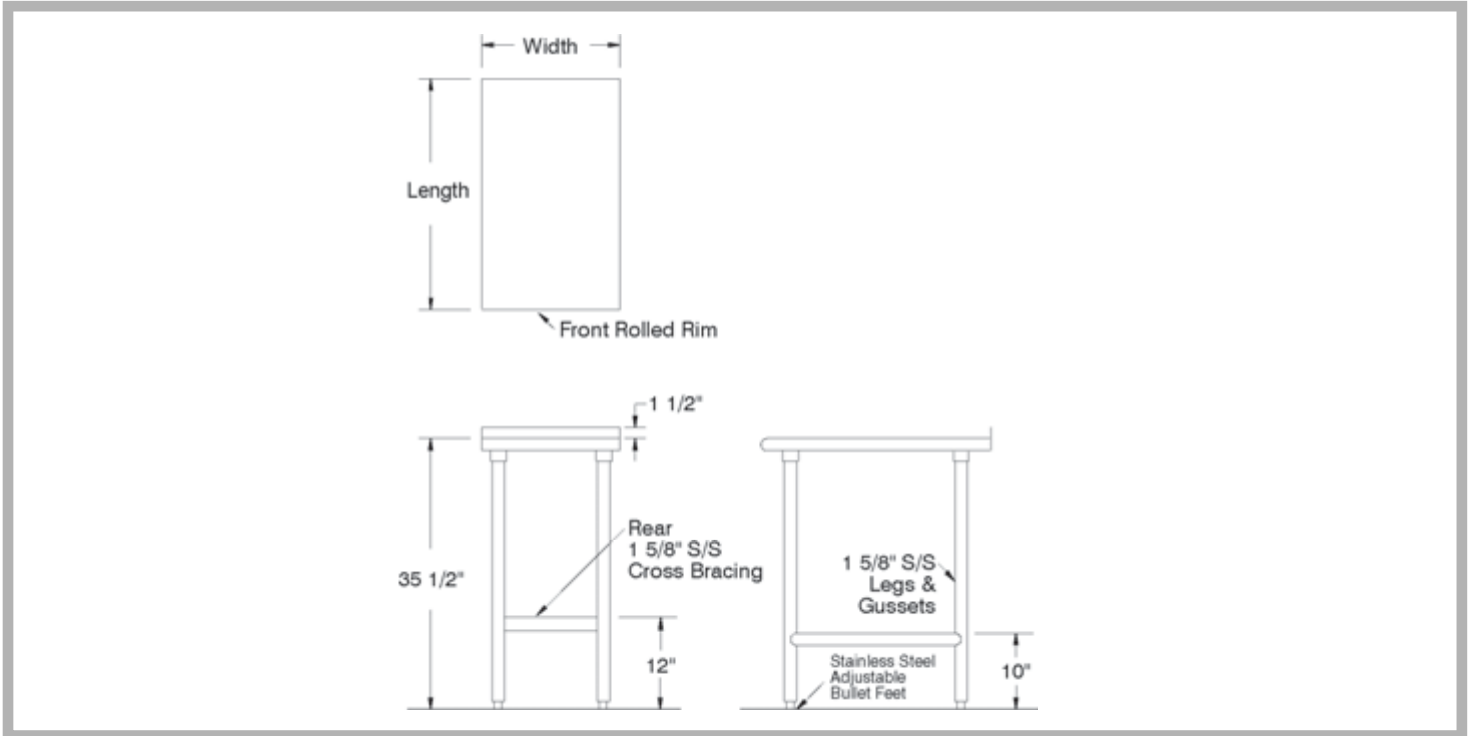

**Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

Email Orders To: [customer@advancetabco.com](mailto:customer@advancetabco.com). For Smart Fabrication™ Quotes, Email To: [smartfab@advancetabco.com](mailto:smartfab@advancetabco.com) or Fax To: 631-586-2933

**NEW YORK**  
Fax: (631) 242-6900

**GEORGIA**  
Fax: (770) 775-5625

**TEXAS**  
Fax: (972) 932-4795

**NEVADA**  
Fax: (775) 972-1578