BUNN°

3 Gallon Iced Tea Brewer with Portable Server

ITEM#		
PROJECT		

DATE



Features

Iced Tea Brewer

- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- · Brews directly into any style portable server.
- Meet your volume needs; brew 3 gallons (11.36 litres) of iced tea at a time.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- TB3 has adjustable steep time for more control over flavor extraction.
- · International electrical configurations available.

Model TB3Q with **TD0-4 Dispenser**

(TDO-4 sold separately) Dimensions (29" trunk): 34" H x 11.6" W x 22"D (86.4cm H x 29.5cm W x 58.4cm D) Dimensions (25.75" trunk): 31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-Tea Product No.: 39000.0007




Easy Clear® EQHP-TEACRTG

Replacement Cartridge Product No.: 39000.1007

Single/Dual Filter Pack Product No.: 20100.0000

Packed per case: 500 Dimensions: $5\frac{1}{4}$ " Base x $3\frac{3}{4}$ " Sidewall 13.34 cm Base x 9.52 cm Sidewall



Product No.: 34100.0002 Capacity: 4 gallons Weight: 13 lbs. Dimensions:

19" H x 10.7" W x 13.7" D 48.26 cm H x 27.18 cm W x 34.8 cm D



TDS-3.0 - Tea Dispenser

Product No.: 33000.0000 Capacity: 3.0 gallons Weight: 9.4 lbs. Dimensions: 19"H x 9.8"W x 12.8"D

48.3cm H x 24.9cm W x 32.5cm D



TD4T - Tea Dispenser

Product No.: 03250.0004 Capacity: 4 gallons Weight: 14 lbs. Dimensions: 21.9" H x 9" W x 13" D

55.63 cm H x 22.86 cm W x 33.02 cm D



Translucent Pouchpack Tea Funnel

Quick dispense, TU-3Q Product No.: 35282.0001 Standard dispense, TU-3 Product No.: 35282.0002



Model	Agency Listing		
TB3Q	UL (NSE)		
TB3	UL (NSF)		
E9003.0000B		Patents Apply	12/06 B1


Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cubic Measure	Shipping Weight	Cord Attached
TB3 [/]	36700.0009	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	43 lbs.	Yes [†]
TB3Q [/]	36700.0013	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3	36700.0030	120	14.4	1680	1730	16.3 gal./hr.	7.9 ft ³	42 lbs.	Yes [†]
TB3Q/ w/TD4T	36700.0041	120	14.4	1680	1730	26.7 gal./hr.	10 ft ³	55 lbs.	Yes [†]
TB3/Sweetner	36700.0043	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	44 lbs.	Yes [†]
TB3∕µ	36700.0055	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3Q	36700.0059	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	41 lbs.	Yes [†]
TB3Q* _f	36700.0076	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3Q [/] w/TD4T	36700.0080	120	14.4	1680	1730	26.7 gal./hr.	10 ft ³	55 lbs.	Yes [†]

"Quick disconnect. '29" trunk height "Has ready light" Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

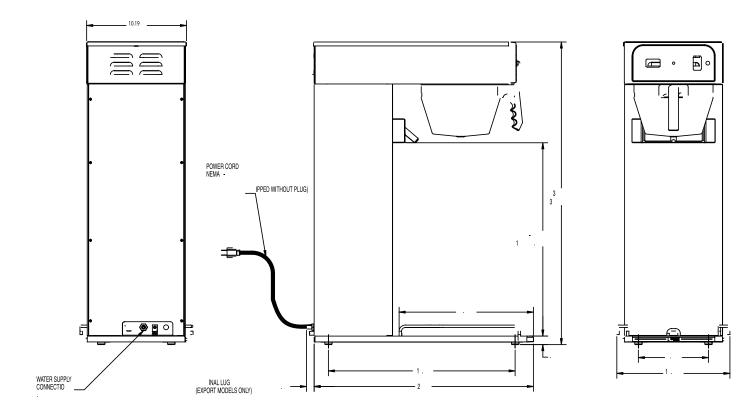

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com