ICB-DV, Tall 120V

Height: 35.0" Width: 10.2" Depth: 22.1" (88.9cm) (25.9cm) (56.1cm)



Server(s) sold separately

Specifications

Product #: 53100.0101 Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	82	60°F (15.5°C)	1	2	60
120/208	14	2900	-	N/A	136	60°F (15.5°C)	1	3	60
120/240	17	4050	-	N/A	181	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	3 1				<u> </u>	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Additional Features

BrewWISE

Funnel: Black Plastic

NSF


• Sleek modernized design language, with rounded angles on the corners and trunk

- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- · BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- · Brew counter keeps track of how many batches are brewed
- · Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)
- Servers not included unless otherwise noted

Agency:





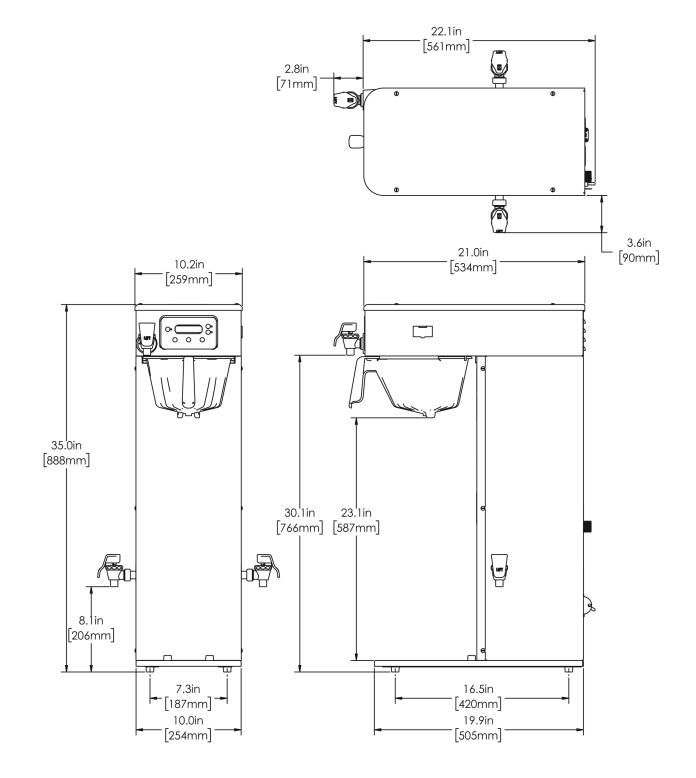

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	10.2 in.	22.1 in.	38.1 in.	14.3 in.	32.3 in.	46.860 lbs	10.139 ft ³	
Metric	88.9 cm	25.9 cm	56.1 cm	96.8 cm	36.2 cm	81.9 cm	21.256 kgs	0.287 m³	




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
09/05/2022

For most current specifications and other info visit bunn.com.
Control of the second seco

Related Products & Accessories: ICB-DV, Tall 120V(53100.0101)

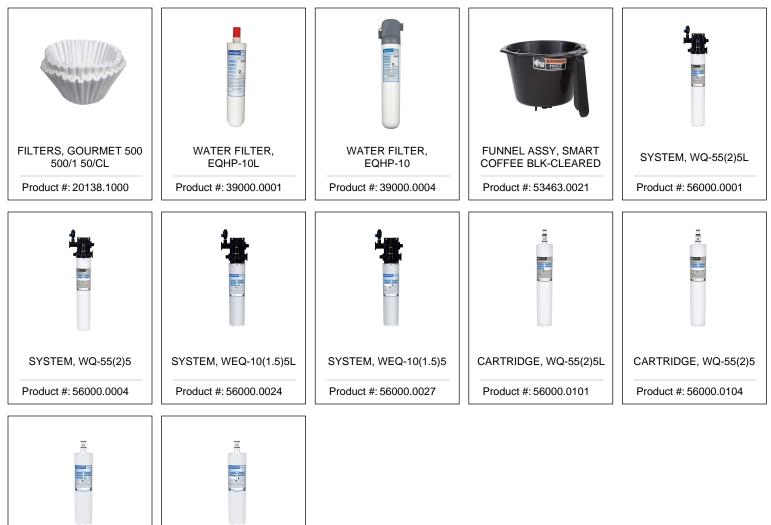

CARTRIDGE, WEQ-10 (1.5)5L Product #: 56000.0121





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving & Holding Options: ICB-DV, Tall 120V(53100.0101)



Product #:42700.0200

Product #:42750.0200

Product #:44000.0200

Product #:44050.0200

Product #:54473.1000

