PROJECT:		
ITEM #		. QTY:
MODEL #		
AIA #	_ SIS #	

VICTORY ELITE™ TOP MOUNT FREEZER

VEFSA-2D-SD-HC



CABINET CONSTRUCTION

- Stainless Steel Front, Aluminum Interior
- Snap-in, Magnetic Door Gasket(s) With A 2 Year Warranty
- · Heavy Duty Cam Lift Hinges With Lifetime Warranty
- Stay-Open Door Feature For Easy Product Loading
- Required Clearance Is 12" Top, 3" Rear And 0" Sides
- 6" Casters
- 8' Cord and Plug

FEATURES

High Performance Refrigeration System With An Electronic Control

ICTORY ELITE™ TOP MOUNT FRE

- · Expansion Valve Technology
- Energy Efficient LED Lighting
- · Heavy Duty Epoxy Coated Shelves

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All **Environmental Concerns**
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Freezer Capable Of Maintaining Product Temperature Down To















- Plus An Additional 4 Year Compressor Warranty Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (Parts Only)



Please verify qualifying units by visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- · Stainless Steel Back
- · Stainless Steel Breaker
- Stainless Steel Exterior
- Tray Slides
- · Stainless Steel Interior
- 6" Legs Or 3" Casters (No charge at time of unit order)
- · Seismic/Flanged Legs
- · Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
- Remote Models* (6" Legs Only) (Refrigerant must be specified at time of order, see note on back page)


3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 | fax: (800) 253-5168


Rev. 3/23/20 Printed in U.S.A.


APPROVAL: _ _ DATE: __



VEFSA-2D-SD-HC

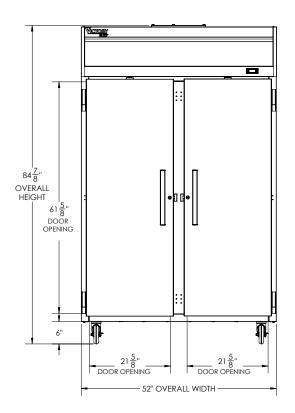

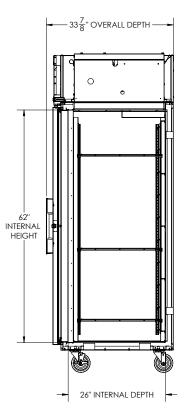



We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

CHARACTERISTICS ELECTRICAL DATA		SHIPPING DETAILS		ILS	
Net Capacity (cubic ft.)	45.2	Cabinet Voltage	115/60/1	Height	88"
Width, Overall (in.)	52"	Total Amperes	10.0	Width	54"
Depth, Overall (with Handle)	33 7/8"	NEMA Plug* (8' cord)	5-15P	Depth	36"
Height Overall (6" Casters)	84 7/8"	REFRIGERATION DATA		Crated Weight	550 lbs
Depth, Door Open 90°	55 1/8"	Condensing Unit Size, HP*	3/4+	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	21 5/8" x 61 5/8"	Refrigerant*	R290		
No. Of Door / Shelves	2/6	Capacity (BTU/HR) (100°F/20°F)	2580		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 3/23/20 Printed in U.S.A.

