

Heavy Duty Aluminum Cantilevered Shelving

ITEM NO. _____
 QUANTITY NO. _____
 JOB NO. _____
 SPEC NO. _____





Specifications:

- Free Standing shelving allows access to all corners.
- Wall bolting not required.
- Perfect for coolers, freezers and backrooms.
- Holds up to seven shelves on 10" centers.
- "D" extrusion front shelves makes shelves more user friendly and easier to clean.
- Adjusts without tools-just lift and pull. Posts are 72" high with front adjustable feet.
- Maximum capacity - 2,500 lb (1,134 kg) per section.
- **5-Year Guarantee** on workmanship and material.




Patented Design #5,074,422

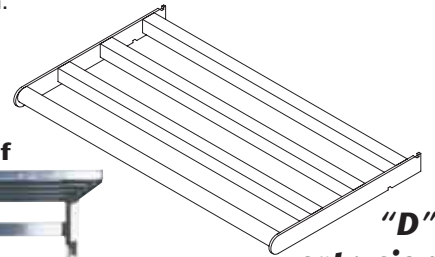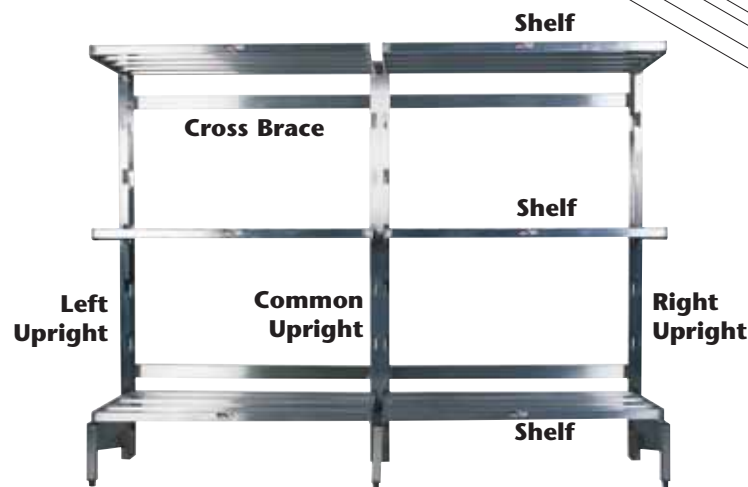

"D"
extrusion
front shelves
makes shelves
more user
friendly and
easier to
clean.

Ordering Instructions:

1. Determine full shelving run length (i.e. 12')
2. Determine number of shelving sections required, using the least number of sections (a 12' run would use 3-4' sections).
3. Select Shelf:
 Type: Tubular, T-Bar, Solid and E-Channel
 Depth: 18", 21" or 24" deep
 Length for section: 3', 4', or 5'
 Quantity per section: i.e. 4 shelves per section
4. Order 3', 4' or 5' cross braces to match the section shelf size.
5. Order a left and right upright for each full run.
 Order common uprights for runs over 5' for use between sections.
6. Order one Hardware Kit per section ordered.



Shelves: 18", 21" & 24" depths and
 36", 48" & 60" lengths.

Cross Braces: 36", 48" and 60" lengths.
 Heavy duty aluminum channel
 1" x 2½" x 1/8".

Uprights: 21" deep upright for 18" & 21"
 depth shelves. 24" deep uprights
 for 24" depth shelves. Heavy
 Duty 1/8" thick 4" x 1¾" aluminum
 channel holds up to seven
 shelves on 10" centers. 72" high
 with outer leg adjustable foot.

LABORATORY CERTIFICATION AND APPROVAL
 SYMBOLS:



439 Oak Street • Garden City, NY 11530 • Tel: 1-800-444-3595 • Fax: 516-222-0371
 www.winholt.com • sales@winholt.com

NEW YORK • GEORGIA • TEXAS • CALIFORNIA



Heavy Duty Aluminum Cantilevered Shelving

ITEM NO. _____

JOB NO. _____

SPEC NO. _____

Component Part Breakdown for Cantilevered Shelving

Component Part Breakdown for Cantilevered Shelving

Model Number	Ordering Number	Description of Parts		Approx. Ship Weight	
		(in)	(mm)	(lb)	(kg)
Tubular Shelves					
SCAS-1836	104820	18" x 36"	(457mm x 914mm)	7	3
SCAS-1848	104838	18" x 48"	(457mm x 1,219mm)	9	4
SCAS-1860	104846	18" x 60"	(457mm x 1,524mm)	10	5
SCAS-2136	104926	21" x 36"	(533mm x 914mm)	7	3
SCAS-2148	104934	21" x 48"	(533mm x 1,219mm)	9	4
SCAS-2160	104942	21" x 60"	(533mm x 1,524mm)	10	5
SCAS-2436	104969	24" x 36"	(610mm x 914mm)	9	4
SCAS-2448	104977	24" x 48"	(610mm x 1,219mm)	11	5
SCAS-2460	104985	24" x 60"	(610mm x 1,524mm)	13	6
Solid Reinforced Shelves					
SCASS-1836	105996	18" x 36"	(457mm x 914mm)	10	5
SCASS-1848	106008	18" x 48"	(457mm x 1,219mm)	13	6
SCASS-1860	106016	18" x 60"	(457mm x 1,524mm)	16	7
SCASS-2136	106075	21" x 36"	(533mm x 914mm)	11	5
SCASS-2148	106083	21" x 48"	(533mm x 1,219mm)	14	6
SCASS-2160	106091	21" x 60"	(533mm x 1,524mm)	18	8
SCASS-2436	106112	24" x 36"	(610mm x 914mm)	12	5
SCASS-2448	106121	24" x 48"	(610mm x 1,219mm)	16	7
SCASS-2460	106139	24" x 60"	(610mm x 1,524mm)	19	9
T-Bar Shelves					
SCAST-1836	163969	18" x 36"	(457mm x 914mm)	7	3
SCAST-1848	163977	18" x 48"	(457mm x 1,219mm)	9	4
SCAST-1860	163985	18" x 60"	(457mm x 1,524mm)	10	5
SCAST-2436	164021	24" x 36"	(610mm x 914mm)	9	4
SCAST-2448	164030	24" x 48"	(610mm x 1,219mm)	11	5
SCAST-2460	164048	24" x 60"	(610mm x 1,524mm)	13	6
E Channel Cantilever Shelving					
SCASCH-2436	206762	24" x 36"	(610mm x 914mm)	10	5
SCASCH-2448	206771	24" x 48"	(610mm x 1,219mm)	12	5
SCASCH-2460	206789	24" x 60"	(610mm x 1,524mm)	14	6
Up-Rights					
SCASU-21L	106518	21" Left Upright for 18" & 21" Shelves		12	5
SCASU-21R	106526	21" Right Upright for 18" & 21" Shelves		12	5
SCASU-24L	106542	24" Left Upright for 24" Shelves		12	5
SCASU-24R	106551	24" Right Upright for 24" Shelves		12	5
SCASU-21	106500	21" Common Upright for 18" & 21" Shelves		19	9
SCASU-24	106534	24" Common Upright for 24" Shelves		19	9
Cross Braces and Hardware					
SCASC-36	105671	Cross Brace - Set of 2		4	2
SCASC-48	105689	Cross Brace - Set of 2		5	2
SCASC-60	105697	Cross Brace - Set of 2		6	3
SCAS-HW	105451	Hardware Kit - 1 for each section		1	0.5


Freight Class: 70

Other sizes available upon request.




SCAS Series

Tubular Shelving 1½" x 1½" aluminum tubing provides air circulation. 18" deep shelves have 4 tubes spaced 4" apart; 21" deep shelf has 4 tubes spaced 5" apart; 24" deep shelf has 5 tubes spaced 4" apart. Shelf Capacity - 900 lb, 408 kg




SCASS Series

Solid Reinforced Shelving Aluminum sheet with aluminum cross tubes underneath for support. Ideal for smaller merchandise. Shelf Capacity - 700 lb, 318 kg



SCAST Series

T-Bar Shelving 1" x 1½" T-Bar spaced 2" apart. Provides air circulation and allows boxes to slide on/off easily. Shelf Capacity - 700 lb, 318 kg



SCASCH Series

E Channel Shelving 4" x 1½" aluminum 14 gauge "E" Channel. Provides increased surface area, yet allows for air circulation. Channel is welded inside a frame of tubing and flat bar. 18" & 21" deep shelves have 2 channels, 24" deep shelf has 3 channels. Shelf Capacity - 1,000 lb, 454 kg

439 Oak Street • Garden City, NY 11530 • Tel: 1-800-444-3595 • Fax: 516-222-0371
 www.winholt.com • sales@winholt.com

NEW YORK • GEORGIA • TEXAS • CALIFORNIA



Sani-Adjustable Aluminum Shelving Component Parts

Easy Order Instructions for Component Parts

To order a 4' section with three Tubular shelves, 20" wide and 68" high, you need the following:



- (3) -SAS2048-Tubular Sani Shelves
- (4) -SASP-68 Poles.



Tubular Shelving

- Constructed of all welded, heavy duty, sanitary aluminum 1 3/4" x 1 1/2" cross tubes for improved air circulation and strength.
- Shelf Capacity 2,000 lb (907kg). Maximum evenly distributed static load capacity.

SAS Series

Model Number	Ordering Number	Overall Dimensions				# of Cross Tubes	Approx. Ship Weight	
		Width		Height			(lb)	(kg)
		(in)	(mm)	(in)	(mm)			
SAS1536	106930	15	381	36	914	3	5	2
SAS1548	106948			48	1,219		8	4
SAS1560	106956			60	1,524		9	4
SAS1572	106964			72	1,829		11	5
SAS1836	106981	18	457	36	914	4	8	4
SAS1848	107001			48	1,219		10	5
SAS1860	107019			60	1,524		12	5
SAS1872	107027			72	1,829		14	6
SAS2036	107060	20	508	36	914	4	8	4
SAS2048	107086			48	1,219		10	5
SAS2060	107094			60	1,524		12	5
SAS2072	107115			72	1,829		14	6
SAS2096	107123			96	2,438		15	7
SAS2436	107140	24	610	36	914	5	10	5
SAS2448	107166			48	1,219		13	6
SAS2460	107174			60	1,524		15	7
SAS2472	107182			72	1,829		18	8

Freight Class: 70



SASCH Series

Channel Shelving

- Constructed of all welded, heavy duty, sanitary aluminum 4" x 1 1/2" E-Channels inside a frame of aluminum tubing.
- Shelf Capacity 2,100 lb (952 kg). Maximum evenly distributed static load capacity.

Model Number	Ordering Number	Overall Dimensions				Approx. Ship Weight	
		Width		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)		
SASCH-2436	204409	24	610	36	914	10	5
SASCH-2448	204433			48	1,219	13	6
SASCH-2460	207191			60	1,524	15	7

Freight Class: 70



Solid Shelving

- Constructed of all welded, heavy duty, sanitary aluminum sheet.
- Shelf Capacity 500 lb (277 kg). Maximum evenly distributed static load capacity.

Model Number	Ordering Number	Overall Dimensions				Approx. Ship Weight	
		Width		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)		
SASS2036	107377	20	508	36	914	6	3
SASS2048	107385			48	1,219	7	3

Freight Class: 70



SASS Series

Reinforced Solid Shelving

- Constructed of all welded, heavy duty, sanitary aluminum sheet metal with cross tubes underneath for extra strength.
- Shelf Capacity 800 lb (363 kg). Maximum evenly distributed static load capacity.

Model Number	Ordering Number	Overall Dimensions				Approx. Ship Weight	
		Width		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)		
SASSR1848	107553	18	457	48	1,219	9	4
SASSR1860	107561			60	1,524	11	5
SASSR2036	107570	20	508	36	914	11	5
SASSR2048	107588			48	1,219	13	6
SASSR2060	107596			60	1,524	15	7
SASSR2436	107617	24	610	36	914	11	5
SASSR2448	107625			48	1,219	14	6
SASSR2460	107633			60	1,524	17	8

Freight Class: 70



SASSR Series

Sani-Adjustable Aluminum Shelving

Sani-Adjustable Shelving Poles

- With 2" (51 mm) marked increments for easy set-up.
- 12" (305 mm) poles are ideal for knock-down Dunnage Racks.

Model Number	Ordering Number	Approx. Height		Approx. Ship Weight	
		(in)	(mm)	(lb)	(kg)
SASP-54	107211	54	1,372	3	1
SASP-68	107220	68	1,727	4	2
SASP-76	107262	76	1,930	5	2
SASP-84	167775	84	2,134	6	3

Freight Class: 70

Sani-Adjustable Shelving Mobile Kit

- Easy conversion from a stationary unit to a mobile unit.
- Overall Capacity 1,200 lb (544 kg).

Model Number	Ordering Number	Description
SAS-MK	106913	(4) 5" Swivel Stem Casters

Freight Class: 65



SAS Mobile Unit

Option:

SASP-ADJ (107297).....Adjustable Bullet Legs/Set of 4

Cooler and Backroom Shelving



Specifications:

- Sanitary and easy to clean. Constructed of all welded, heavy duty, sanitary aluminum.
- Mobile units roll easily on two rigid and two swivel heavy duty casters, with 6" x 2" phenolic wheels.



ALMCS
Heavy Duty 6" Casters

Lifetime Guarantee
Against Rust or Corrosion on
All Aluminum Products.



ALSCS

Model Number	Ordering Number	Overall Dimensions						# of Shelves	Approx. Ship Wt.	
		Width		Length		Height			(lb)	(kg)
		(in)	(mm)	(in)	(mm)	(in)	(mm)			
Tubular Bar Style										
ALSCS-48-220	102269	20	508	48	1,219	60	1,524	2 34½" (876mm) Between Shelves	24	11
ALSCS-48-224	102277	24	610						28	13
ALSCS-60-220	102314	20	508	60	1,524	60	1,524	3 22½" (572mm) Between Shelves	29	13
ALSCS-60-224	102322	24	610						33	15
ALSCS-36-320	143511	20	508	36	914	60	1,524	3 22½" (572mm) Between Shelves	26	12
ALSCS-36-324	143693	24	610						31	14
ALSCS-48-320	102285	20	508	48	1,219	60	1,524	3 22½" (572mm) Between Shelves	31	14
ALSCS-48-324	102293	24	610						37	17
ALSCS-60-320	102331	20	508	60	1,524	60	1,524	3 22½" (572mm) Between Shelves	36	16
ALSCS-60-324	102349	24	610						44	20
T-Bar Style										
ALSTB-48-320	165112	20	508	48	1,219	60	1,524	3 22½" (572mm) Between Shelves	36	16
ALSTB-48-324	152979	24	610						41	19
ALSTB-60-320	165104	20	508	60	1,524	60	1,524	3 22½" (572mm) Between Shelves	41	19
ALSTB-60-324	152987	24	610						48	22
E-Channel										
ALSCH-48-220	206498	20	508	48	1,219	60	1,524	2 34½" (876mm) Between Shelves	25	11
ALSCH-48-224	206501	24	610						29	13
ALSCH-60-220	206535	20	508	60	1,524	60	1,524	3 22½" (572mm) Between Shelves	30	14
ALSCH-60-224	206543	24	610						34	15
ALSCH-48-320	206586	20	508	48	1,219	60	1,524	3 22½" (572mm) Between Shelves	33	15
ALSCH-48-324	206594	24	610						39	18
ALSCH-60-320	206615	20	508	60	1,524	60	1,524	3 22½" (572mm) Between Shelves	38	17
ALSCH-60-324	206623	24	610						46	21
Replacement Caster Information										
7311-CB2	122964	Swivel Plate Caster with 6" Phenolic Wheel							—	
746	123481	Swivel Plate Caster with 6" Phenolic Wheel & Brake							—	
7119	122331	6" Phenolic Wheel							—	

Freight Class: 150

ALMCSFor Mobile Tubular Bar replace prefix with "ALMCS"
ALMTB.....For Mobile T-Bar replace prefix with "ALMTB"
LC-514 (129091) Locking Brake Kit (2)

Cooler and Backroom Shelving



ITEM NO. _____

JOB NO. _____

SPEC NO. _____

Heavy Duty Sani-Mobile Cooler Cart



Heavy Duty Sani-Mobile Cooler Cart

Specifications:

- Ideal for boxed beef. Constructed of all welded, heavy duty aluminum.
- Capacity: 3,000 lb (1361 kg).
- Maneuvers easily on two 6" x 2" phenolic swivel plate casters and two 6" x 2" rigid plate casters.



Model Number	Ordering Number	Overall Dimensions						Approx. Ship Weight	
		Width		Length		Height		(lb)	(kg)
		(in)	(mm)	(in)	(mm)	(in)	(mm)		
SMC-63	102411	25	635	63	1,600	71	1,803	70	32
Replacement Caster Information									
7311-CB2	122964	Swivel Plate Caster with 6" Phenolic Wheel						—	
746	123481	Rigid Plate Caster with 6" Phenolic Wheel						—	
7119	122331	6" Phenolic Wheel						—	

Freight Class: 150

Win-Holt Equipment Group is a leading manufacturer of material & food handling equipment. Since 1946, retailers and restaurant chains have trusted Win-Holt's equipment to ensure increased productivity and efficiency in their operation. Multiple locations reduce logistics and transportation costs. All Win-Holt associates are dedicated to customer satisfaction.

For general sales and engineering information only. All units are subject to change without notice. Please consult factory for certified specifications.

439 Oak Street • Garden City, NY 11530 • Tel: 1-800-444-3595 • Fax: 516-222-0371
www.winholt.com • sales@winholt.com

NEW YORK • GEORGIA • TEXAS • CALIFORNIA

Heavy Duty Sani-Mobil Cooler Cart