## WORKTOP REFRIGERATOR

## Model: SW32-GD

# 32" Worktop Display Refrigerator with Hinged Glass Door

Stainless steel front and top, aluminum end panels, case back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



#### **Options and Accessories**

(upcharge and lead times may apply)			
Stainless steel exterior and interior	Backsplash - BS models		
Stainless back in lieu of aluminum	Expansion valve system		
Overshelves (single or double)	Adjustable legs		
Additional epoxy-coated steel shelves	Remote models		
Stainless steel shelves	Door lock		
Automatic electric condensate evaporator	Digital thermometer		
Stainless steel roll-out drawers in lieu of door - D models	Special electrical requirements (consult factory)		
Solid door			

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

### Standard Model Features

#### **REFRIGERATION SYSTEM**

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant Automatic, energy saving, non-electric condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation Double pane, low-e, tempered hinged glass door Magnetic snap-in door gasket Heavy-duty, epoxy-coated steel shelf Completely enclosed, vented and removable case back 5" casters

#### **MODEL FEATURES**

Interior hanging thermometer LED interior lighting Field rehingeable door


APPROVAL:


#### **Model Specifications**

#### **Model Plan Views**

שוח	<b>FN</b>	รเก	ΝΔΙ	ΠA	ТΔ

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	9.0 (253 cu l)
Width, Overall (in.)	32 (813 mm)
Depth, Overall (in.) (incl. handle & bumpers)	31 7/16 (799 mm)
Depth, Body Only (less door) (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	35 1/4 (895 mm)
Shelf Area (sq. ft.)	3.9 (.4 sq m)
No. of Shelves	1
No. of Doors	1
Interior Depth (in.)	See Drawing
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	28 (711 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	7.0 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	235 (107 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	39 (991 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

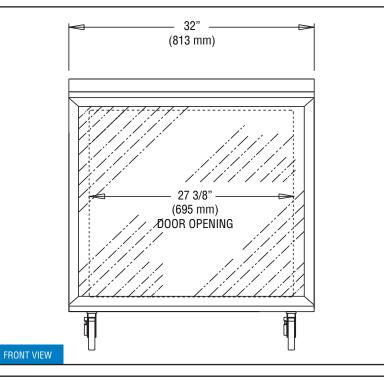

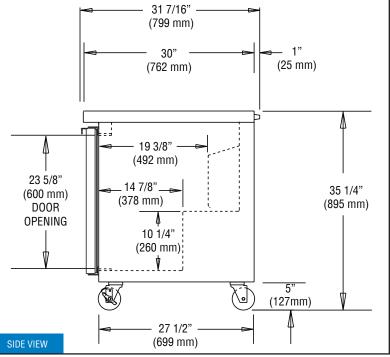

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





#### **Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2013. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.