

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZON BOTTOM MOUNT REACH-IN

HBR19HC Glass Door Reach-in Refrigerator **Hydrocarbon Series**

MODEL: HBR19HC-1-G



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- · Stainless steel interior
- LED lighting
- Full electronic control with one-touch defrost
- One-piece grille allow easy removal/installation for preventative maintenance
- Door lock (solid doors only)
- Self closing door with 120° stay open feature
- Spring-loaded style hinges
- Plug-in magnetic door gaskets
- Three (3) heavy duty epoxy coated wire shelves
- 6" Casters with two (2) brakes

OPTIONS & ACCESSORIES

- 3" caster or 6" legs
- · Epoxy shelves
- Shelf clips
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerator capable of maintaining product temperatures between 36°F and 38°F
















MODEL	HBR19HC-1-G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall with Handle	27 ½"	
Height Overall with Casters	84"	
Number of Doors	2	
Depth with Door Open 90°	51 ¼"	
Door Opening (in)	24 ¹ ⁄8" x 52 ⁵⁄8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	17.87	
Internal Width Overall (in)	24 1/8"	
Internal Depth Overall (in)	19 ¾"	
Internal Height Overall (in)	61 ⁵ ⁄8"	
Internal Height Useable (in)	53"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3.0	
REFRIGERATION DATA		
Horsepower*	1/4	
Capacity (BTU/Hr)*	1480	
SHIPPING DATA		
Gross Weight - Crated	380 lbs	
Height - Crated	85"	
Width - Crated	36"	
Depth - Crated	34"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bottom Mount Reach-In Refrigerator Model: HBR19HC-1-G

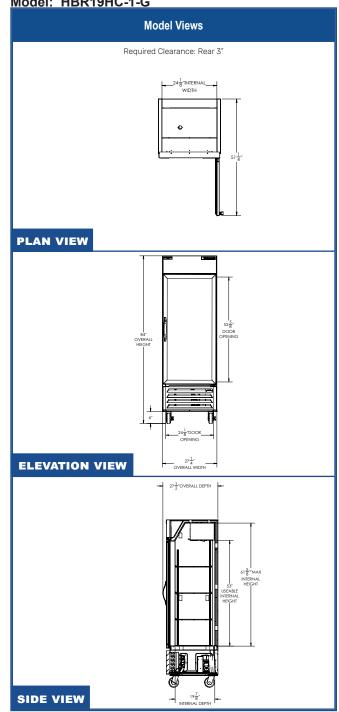

*ELECTRICAL CONNECTION



115/60/1 **NEMA 5-15P**

Unit pre-wired at factory and include 8' long cord and plug set.

