

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

WTR 29" DEPTH WORKTOP

MODELS: WTR48AHC-FIP

WTR48AHC Worktop Refrigerator with Foamed-in Place Backsplash Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides and doors, (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Stainless steel worktop
- Foamed in place backsplash
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Painted aluminum doors handle
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per section standard
- Field-reversible doors
- Maintains product temperature between 36°F and 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil

OPTIONS & ACCESSORIES

- Stainless steel back and grille
- Stainless steel interior
- Right or left hinged door
- □ Locks (solid doors only)
- □ Bun rack
- ☐ Wire shelf divider
- Cutting board
- ☐ Thermometer digital or stem type dial
- ☐ 3" Casters or 6" legs
- Low profile casters
- Remote option


















| MODEL | WTR48AHC-FIP |
|------------------------------------|--------------------------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 48" |
| Depth Overall with Handle & Bumper | 32" |
| Height Overall with 6" Casters | 39 5/8" |
| Number of Doors | 2 |
| Depth with Door Open 90 ° | 52 1/4" |
| Door Opening (in) | 19 5/8" x 21 5/8" |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 11.82 |
| Internal Width Overall (in) | 44" |
| Internal Depth Overall (in) | 23 1/2" |
| Internal Depth Useable (in) | Upper 18 1/2" Lower 15 3/8" |
| Internal Height Front (in) | 23" |
| Internal Height Rear (in) | 16" |
| Number of Shelves | 4 |
| ELECTRICAL DATA | |
| Full Load Amperes 115/60/1 | 2.2 |
| REFRIGERATION DATA | |
| Horsepower | 1/6 |
| Capacity (BTU/Hr)* | 1094 |
| WEIGHT DATA | |
| Gross Weight (Crated lbs) | 266 lbs |
| Height - Crated | 43" |
| Width - Crated | 51" |
| Depth - Crated | 33" |

Worktop Refrigerator

Models: WTR48AHC-FIP

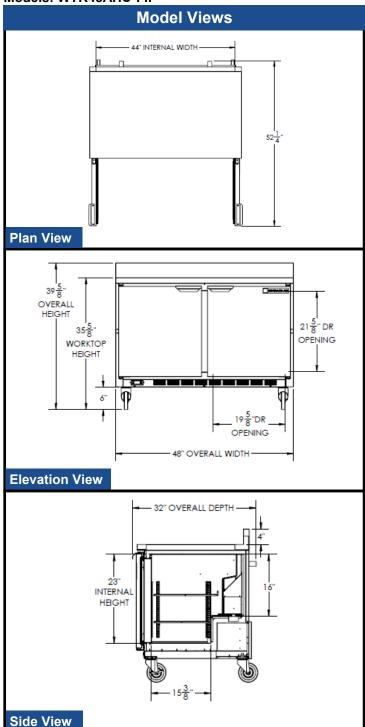

ELECTRICAL CONNECTION















Units pre-wired at factory and include 8' long cord and plug set.



